Terminus Wall

IP65 | IK11 (50J) | Downlights | Class I | Surface | HT40°C

Community and Public | Transport

Terminus Wall is a vandal resistant luminaire specifically designed for transport applications and community and public installations.

Standard Colours

Matt White | Matt Silver | Matt Titanium

Product Information

Terminus Wall's uniform illumination ensures a consistent light distribution, enhancing visibility and reducing glare. Incorporating a removable gear tray ensures Terminus Wall is quick and easy to maintain, whilst enabling sustainable technology upgrades.

Community and Public applications include the exterior and perimeter of buildings. Transport applications include station forecourts.

This luminaire is designed for longevity and sustainability and adheres to our circular design principles. We conduct a circular economy assessment using TM66 and measure embodied carbon ($kgCO_2e$) in accordance with TM65.2.

Impact Resistance Rating: IK11 (50J). What is IK Rating?

Ingress Protection Rating: IP65. What is IP Rating?

Housing: Extruded and die cast aluminium body.

Paint: Polyester power coat. All Colour Options Available Here.

Diffuser: Clear polycarbonate diffuser.

Driver: Integral electronic control gear.

Mounting: Wall.

Cable Entry: Supplied with flying lead.

Design Life: 30+ years. What is Design Life?

Technical Information

TerminusWall	Output (Lum/lm)	Load (W)	Efficacy (lm/W)	CCT (K)
Wide Beam				
TMW-1100NW-C-MT	966	8.3	117	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	544	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-2000NW-C-MT	1674	14.2	118	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	544	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-3000NW-C-MT	2367	19.8	119	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	544	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-4500NW-C-MT	3635	31.2	116	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	544	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-1100WW-C-MT	918	8.3	111	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	516	-
	Dimensions			
	Ø184mm, 290mm, 275mm			

TerminusWall	Output (Lum/lm)	Load (W)	Efficacy (lm/W)	CCT (K)
Wide Beam				
TMW-2000WW-C-MT	1590	14.2	112	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	516	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-3000WW-C-MT	2249	19.8	114	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	516	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-4500WW-C-MT	3453	31.2	111	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	516	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
Medium Beam				
TMW-1100NM-C-MT	943	8.2	115	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	527	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-2000NM-C-MT	1664	14.2	117	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	527	-
	Dimensions			
	Ø184mm, 290mm, 275mm			

TerminusWall	Output (Lum/lm)	Load (W)	Efficacy (lm/W)	CCT (K)
Medium Beam				
TMW-3000NM-C-MT	2332	20.1	116	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	527	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-4500NM-C-MT	3511	31.2	113	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	527	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-1100WM-C-MT	896	8.2	109	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	500	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-2000WM-C-MT	1581	14.2	111	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	500	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMW-3000WM-C-MT	2215	20.1	110	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	500	-
	Dimensions			
	Ø184mm, 290mm, 275mm			

TerminusWall	Output (Lum/lm)	Load (W)	Efficacy (lm/W)	CCT (K)
Medium Beam				
TMW-4500WM-C-MT	3335	31.2	107	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	40	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	500	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
Wide Beam Up/Down				
TMWD-1100NW-C-MT	966/966 (Down/Up)	15.2	127	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	-	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	544	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMWD-2000NW-C-MT	1674/1674 (Down/Up)	25.2	133	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	-	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	544	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMWD-1100WW-C-MT	918/918 (Down/Up)	15.2	121	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	-	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	516	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMWD-2000WW-C-MT	1590/1590 (Down/Up)	25.2	126	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	-	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	516	-
	Dimensions			
	Ø184mm, 290mm, 275mm			

TerminusWall	Output (Lum/lm)	Load (W)	Efficacy (lm/W)	CCT (K)
Medium Beam Up/Down				
TMWD-1100NM-C-MT	943/943 (Down/Up)	15.2	124	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	-	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	527	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMWD-2000NM-C-MT	1664/1664 (Down/Up)	25.2	132	4000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	-	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	527	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMWD-1100WM-C-MT	896/896 (Down/Up)	15.2	118	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	-	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	500	-
	Dimensions			
	Ø184mm, 290mm, 275mm			
TMWD-2000WM-C-MT	1581/1581 (Down/Up)	25.2	125	3000
	Weight (kg)	**CRI**	**High Temp (°C)**	**LED Lifetime**
	4.5	80	-	$L_{80}B_{10}$>60,000h
	Driver lifetime (up to hours)	**LED Energy Rating**	**Emergency Output (Lum/lm)**	**Nightlight Output (Lum/lm)**
	100,000	C	500	-
	Dimensions			
	Ø184mm, 290mm, 275mm			

Fitting Options

DALI with **% Pre-set	-D
Maintained Emergency 3 Hour	-E3
Matt White	-MW
Matt Silver	-MS
Matt Titanium	-MT
DALI-2 Dimming / Monitoring	-DA

- For paint colour options, please replace -MT with required paint code.
- HT Applies to standard version. For any options (e.g. -E3), please check with technical sales.
- For Post Top version, please contact technical sales on +44 (0)20 8254 2022 or email technical@designplan.co.uk.
- Upward light only available on 1100lm and 2000lm versions.
- For -EB option, please note that remote box is IP65 rated.
- For lighting calculations utilising the Up/Down Terminus Wall version, please use 2 x single Terminus Wall LDT files. Emergency output refers to the downward output.

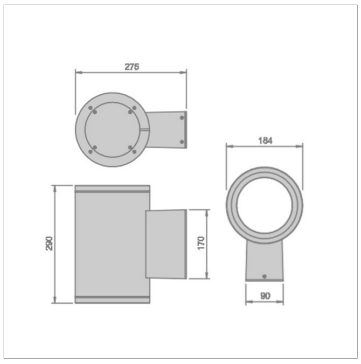

Terminus Wall Drawing

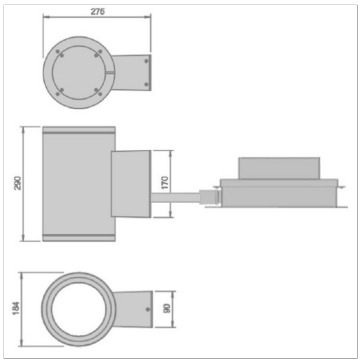

Terminus Wall with remote control gear Drawing

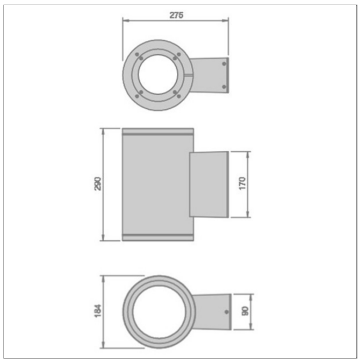

Terminus Wall Up/Down Drawing

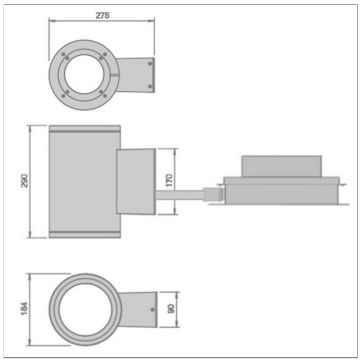

Terminus Wall Up/Down with Remote Control Gear Drawing

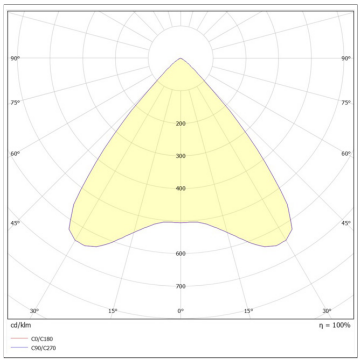

Terminus Wall Wide Beam Polar Curve

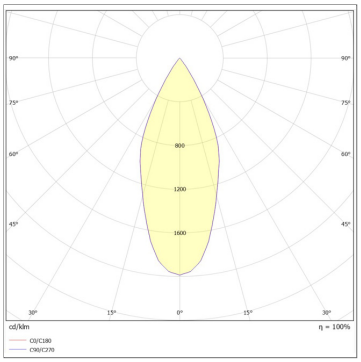

Terminus Wall Medium Beam Polar Curve