


# Parkalux Angled

## Hard wearing angled vandal and weather resistant linear fitting.



- Suitable for wall and cornice mounting.
- Zinc-coated steel body finished in black polyester powder coat.
- Polycarbonate diffuser held against gasket by tamperproof screws.
- Electronic control gear on removable tray with fused plug & socket connector block.
- Provision for conduit entry in back and at ends, gaskets provided.



### LAMP OPTIONS

1245mm LONG

LED – OPAL	Lamps	Temp	Load	Lum/lms	Efficacy	Weight
D323/4/2000NW/XB	LED Array	4000K	21W	2167lm	103lm/W	5KG
D323/4/3000NW/XB	LED Array	4000K	28W	2866lm	103lm/W	5KG
D323/4/4000NW/XB	LED Array	4000K	35W	3478lm	99lm/W	5KG
D323/4/5000NW/XB	LED Array	4000K	43W	4217lm	99lm/W	5KG
D323/4/6000NW/XB	LED Array	4000K	51W	4725lm	94lm/W	5KG

### LINEAR FLUORESCENT – PATTERNED

D323/4/228T5/PB	2 x 28W T5	N/A	62W	3591lm	58lm/W	5KG
-----------------	------------	-----	-----	--------	--------	-----

1560mm LONG

### LED – OPAL

D323/5/2500NW/XB	LED Array	4000K	27W	2709lm	100lm/W	6KG
D323/5/3750NW/XB	LED Array	4000K	35W	3583lm	102lm/W	6KG
D323/5/5000NW/XB	LED Array	4000K	44W	4348lm	99lm/W	6KG
D323/5/6250NW/XB	LED Array	4000K	54W	5271lm	98lm/W	6KG
D323/5/7500NW/XB	LED Array	4000K	63W	5906lm	95lm/W	6KG

### LINEAR FLUORESCENT – PATTERNED

D323/5/235T5/PB	2 x 35W T5	N/A	74W	4549lm	61lm/W	6KG
D323/5/249T5/PB	2 x 49W T5	N/A	106W	5985lm	57lm/W	6KG


### FITTING OPTIONS

Textured white finish	replace B with W
Titanium finish	replace B with C49
Integral 3 hour duration emergency	add suffix /EM3


Self test 3 hour duration emergency	add suffix /EM3S
DALI 3 hour duration emergency	add suffix /EM3D
DALI dimming/monitoring	add suffix /DALI
Switch dimming	add suffix /DIM
Blank ends	add suffix /BE
For Network Rail specification	add suffix /NET
Warm white LEDs (3000K)	contact technical sales
Corridor function*	add suffix /CF10

\* CF10 option available on LED only and will only work if combined with /MWSB or

/MWSA, or an external presence detection sensor supplied by others

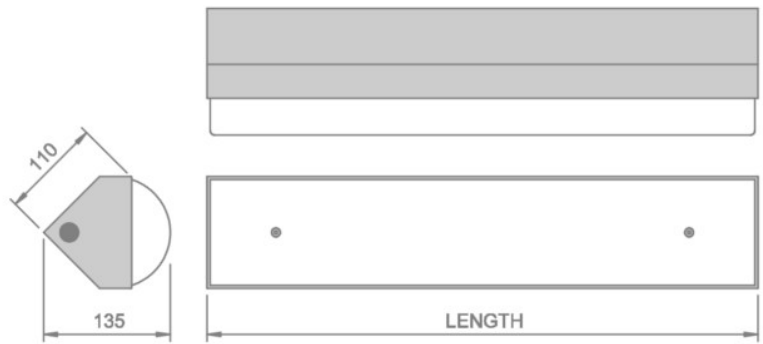

**PARKALUX LED ANGLED**

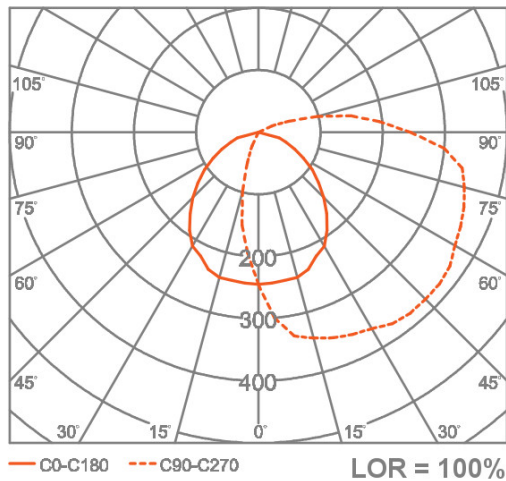

**PARKALUX ANGLED T5 (PATTERNED)**

