Tuscan Trunking

CMS/Trunking/Dummy Bodies | Class I | Surface

Community and Public | Custodial | Secure Healthcare | Transport

Tuscan Trunking is a cable management system specifically designed for challenging environments, such as custodial facilities, transport applications and community and public installations.

Standard Colours

Textured White

Product Information

Tuscan Trunking is a three-compartment trunking system for power, telephones, TV, alarm, door opening, CCTV or other required services neatly behind the light fitting. Available in 45 degree angle with straight sections supplied up to 1800mm in length (maintaining a 300mm centre).

Community and Public applications include subways and underpasses. Custodial applications include association areas, police stations and law courts. Each application is unique and will be catered to your requirements.

Housing: Zinc coated steel body.

Paint: Polyester powder coat. All Colour Options Available Here.

Diffuser: Opal polycarbonate diffuser in frame secured with tamperproof screws.

Driver: Electronic control gear on removable tray for ease of repair/upgrade with fused plug & socket connector block.

Mounting: Cornice

Cable Entry: 3 compartment CMS

Design Life: 30+ years. What is Design Life?

Technical Information

TuscanTrunking	Output (Lum/Im)	Load (W)	Efficacy (lm/W)	CCT (K)
L1500mm				
TRGT-5-6250N	4553	46.7	98	4000
	Weight (kg)	CRI	High Temp (°C)	LED Lifetime
	-	CRI>80	-	$L_{80}B_{10}$>102,000h
	Driver lifetime (up to hours)	LED Energy Rating	Emergency Output (Lum/Im)	Nightlight Output (Lum/Im)
	100,000	B	588	-
	Dimensions			
	1500mm			

Fitting Options
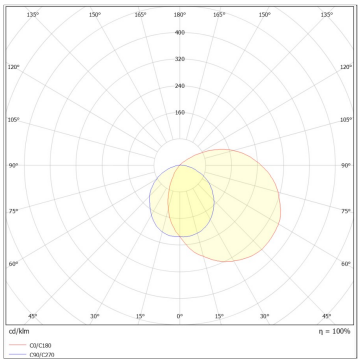
Coastal Paint Finish (Zone 2)	-Z2
Screw Allen Head	-SA
Maintained Emergency 3 Hour, Self Test	-ES
Maintained Emergency 3 Hour, DALI	-ED
Maintained Emergency 3 Hour	-E3
Textured White	-TW